


Naaldhulslager BRI183020-U-IKO - BRI183020-U-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/bri183020-u-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

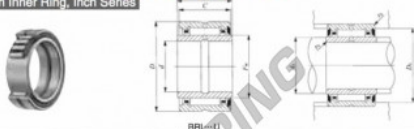

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)			
	With two seals	With one seal		d	D	C	B
28.575 (1 1/4)		BRI 183020 U	211	28.575 (1 1/4)	47.625 (1 7/8)	31.750 (1 1/4)	32.000
F_w	Standard mounting dimensions (mm)			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring LRBZ 182220 B
	Min.	Max.	as max. ⁽¹⁾				
34.925 (1 3/8)	33.5	33.9	42.4	0.6	38 500	60 000	5 500

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952382593
Binnendiameter	28.575 mm
Buitendiameter	47.625 mm
Dikte	31.75 mm
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE