


Naaldhulslager BRI223520-U-IKO - BRI223520-U-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/bri223520-u-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

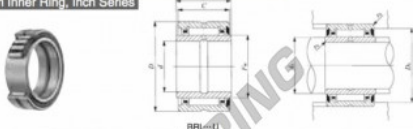

| Shaft dia. mm (inch) | Identification number | | Mass (Ref.) g | Boundary dimensions mm(inch) | | | | |
|----------------------------|-----------------------------------|---------------------|---------------------|---------------------------------------|--|--|----------------------|--|
| | With two seals | With one seal | | d | D | C | B | |
| 34.925 (1 3/8) | | BRI 223520 U | 275 | 34.925 (1 3/8) | 55.562 (2 1/8) | 31.750 (1 1/4) | 32.000 | |
| F_w | Standard mounting dimensions (mm) | | | Basic dynamic load rating C N | Basic static load rating C_0 N | Allowable rotational speed ^(*) rpm | Assembled inner ring | |
| | Min. | Max. | r as max. | | | | | |
| | 40.2 | 40.2 | 48.3 | 44 800 | 70 900 | 4 500 | LRBZ 222620 B | |

Notes: (*) Minimum allowable value of chamfer dimension r
(**) Allowable rotational speed applies to grease lubrication.
Remark: The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCTKENMERKEN

| | |
|----------------|---------------|
| Merk | IKO |
| N° Ean13 | 3663952382630 |
| Binnendiameter | 34.925 mm |
| Buitendiameter | 55.562 mm |
| Dikte | 31.75 mm |
| Verpakking | 1 |

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE