


## Naaldhulslager GBRI142620-UU-IKO - GBRI142620-UU-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/gbri142620-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

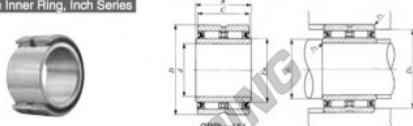

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
22.225 ( $\frac{7}{8}$ )	GBRI 142620 UU		200	22.225 $\frac{7}{8}$	41.275 $1\frac{1}{2}$	31.750 $1\frac{1}{2}$			
B	F <sub>w</sub>	Standard mounting dimensions - mm		Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring		
		Min.	Max.					D <sub>s</sub> Max.	r <sub>as max</sub> <sup>(1)</sup>
32.000	28.575 $1\frac{1}{4}$	27	27.5	36.3	0.6	43 900	75 300	3 000	LRBZ 141820

Notes: (1) Minimum allowable value of chamfer dimension r.  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952383354
Binnendiameter	22.225 mm
Buitendiameter	41.275 mm
Dikte	31.75 mm
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE