


Naaldhulslager GBRI162820-UU-IKO - GBRI162820-UU-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/gbri162820-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

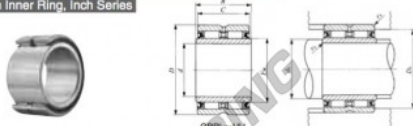

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		<i>d</i>	<i>D</i>	<i>C</i>			
25.400 (1)	GBRI 162820 UU		220	25.400 (1)	44.450 (1.75)	31.750 (1.25)			
<i>B</i>	<i>F_w</i>	Standard mounting dimensions mm		Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring		
		<i>d</i> Min.	<i>d</i> Max.					<i>D_s</i> Max.	<i>r_{as max}</i> ⁽¹⁾
32.000	31.750 (1.25)	30.5	30.7	39.6	0.6	46 600	83 900	2 500	LRBZ 162020

Notes: (1) Minimum allowable value of chamfer dimension *r*.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952383361
Binnendiameter	25.4 mm
Buitendiameter	44.45 mm
Dikte	31.75 mm
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE