


Naaldhulslager GBRI406028-UU-IKO - GBRI406028-UU-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/gbri406028-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

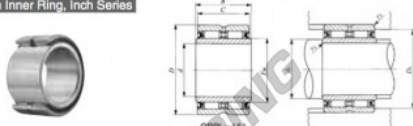

Shaft dia. mm (inch)	Identification number				Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals		With one seal			<i>d</i>	<i>D</i>	<i>C</i>
63.500 (2 1/2)	GBRI 406028 UU				1 140	63.500 (2 1/2)	95.250 (3 7/8)	44.450 (1 7/8)

<i>B</i>	<i>F_w</i>	Standard mounting dimensions mm				<i>r</i> _{as max} (1)	Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed(2) rpm	Assembled inner ring
		Min.	Max.	<i>D_s</i> Max.	<i>r</i> _{as max}					
44.700	76.200 (3)	71	73	88	1.5	101 000	215 000	1 100	LRBZ 404828	

Notes: (1) Minimum allowable value of chamfer dimension *r*.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952383569
Binnendiameter	63.5 mm
Buitendiameter	95.25 mm
Dikte	44.45 mm
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE