


Naaldhulslager

NBXI2530Z-IKO - NBXI2530Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/nbxi2530z-iko>

LINEAR TYPE NEEDLE ROLLER BEARINGS

Needle Bearings with Thrust Ball Bearing With Inner Ring
Needle Bearings with Thrust Roller Bearing With Inner Ring

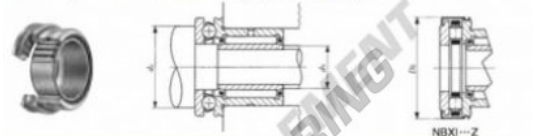

Identification number												
Mass (Ref.) g		With dust cover		Mass (Ref.) g		Mass (Ref.) g		With dust cover		Mass (Ref.) g		d
---		---		---		NBXI 2530Z		200		25		25

Boundary dimensions mm				Bore diameter mm		Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed ⁽¹⁾		Assemble				
B	H	I ₁	I ₂	d _s	d _b	Radial	Axial	Radial	Axial	N	rpm					
20.5	11	9.5	0.6	0.3	30	45	29	25	100	27	400	40	100	81 000	8 000	LRT 1

Minimum allowable value of chamfer dimension r
Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 70% of this value is allowable in IAX series, and a maximum of 25% of this value is allowable in the NBXI series.
The outer ring has an oil groove and an oil hole.
Grease is not prepacked. Perform proper lubrication.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952390871
Binnendiameter	25 mm
Buitendiameter	42 mm
Dikte	30 mm
Verpakking	1

contact@123kogellager.nl
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE