Naaldhulslager
NBXI3532Z-IKO - NBXI3532Z-IKO

https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/nbxi3532z-iko

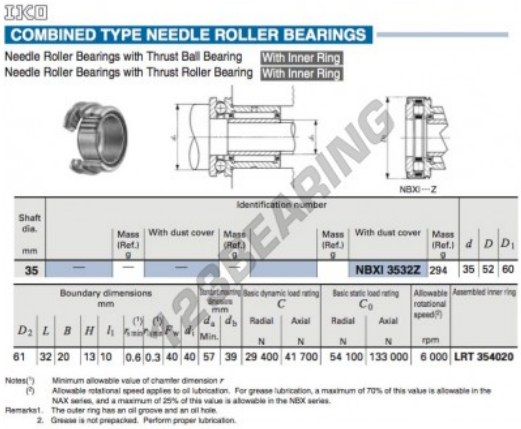

IKO

COMBINED TYPE NEEDLE ROLLER BEARINGS

Needle Roller Bearings with Thrust Ball Bearing — With Inner Ring
Needle Roller Bearings with Thrust Roller Bearing — With Inner Ring

NBXI···Z

Shaft dia. mm	Identification number	Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover	Mass (Ref.) g	d	D	D_1
35	—	—	—	—			NBXI 3532Z	294	35	52	60

Boundary dimensions mm D_2	L	B	H	l_1	(1) $r_{1,min}$	(1) $r_{2,min}$	F_w	d_i	Standard mounting dimensions mm d_a Min.	d_b	Basic dynamic load rating C Radial N	Axial N	Basic static load rating C_0 Radial N	Axial N	Allowable rotational speed(2) rpm	Assembled inner ring
61	32	20	13	10	0.6	0.3	40	40	57	39	29 400	41 700	54 100	133 000	6 000	LRT 354020

Notes(1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 70% of this value is allowable in the NAX series, and a maximum of 25% of this value is allowable in the NBX series.
Remarks1. The outer ring has an oil groove and an oil hole.
2. Grease is not prepacked. Perform proper lubrication.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952390956
Binnendiameter	35 mm
Binnendiameter	1.378" inch
Buitendiameter	52 mm
Buitendiameter	2.047" inch
Dikte	32 mm
Dikte	1.26" inch
Verpakking	1

contact@123kogellager.nl
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE