


GE Stangkop SBB44-IKO - SBB44-IKO

<https://www.123kogellager.nl/kogellager-behuizing/stangkop/ge/sbb44-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings Inch Series

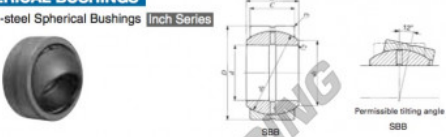

Shaft dia. mm (inch)	Identification number		Mass (Ref.) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		d	D	B	C
69.850 (2 3/4)	SBB 44		2.44	69.850 (2 3/4)	111.125 (4 3/8)	61.11 (2.406)	52.37 (2.062)
Radial internal clearance mm Min./Max.	Mounting dimensions mm		Dynamic load capacity C _d N	Static load capacity C _s N			
	d _k	d ₁ r ₁ max. r ₂ max.		C _d	C _s	C _s	
100(3.937)	0.10 / 0.20 79.0 0.6 0.8		514 000	3 080 000			

Notes:
(1) Minimum allowable value of chamfer dimensions r₁ and r₂.
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_k.
Remark: The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952392905
Binnendiameter	69.85 mm
Buitendiameter	111.125 mm
Dikte	61.11 mm
Type	GE
Smering	zonder
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE