


GE Stangkop SBB76-2RS-IKO - SBB76-2RS-IKO

<https://www.123kogellager.nl/kogellager-behuizing/stangkop/ge/sbb76-2rs-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings Inch Series

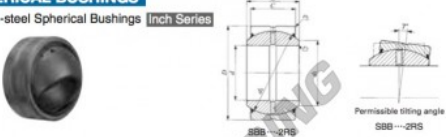

Shaft dia. mm (inch)	Identification number		Mass (Ref.) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		d	D	B	C
120.650 (4 7/8)		SBB 76-2RS	11.6	120.650 (4 7/8)	187.325 (7 3/8)	105.56 (4.156)	90.47 (3.562)
d _k	Radial internal clearance mm Min./Max.	Mounting dimensions mm		Dynamic load capacity C _d N	Static load capacity C _s N		
173(6.811)	0.13 / 0.23	d ₁	r ₁ Max. r ₂ Max.	1 530 000	9 210 000		

Notes: (1) Minimum allowable value of chamfer dimensions r₁ and r₂.
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_k.
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952393070
Binnendiameter	120.65 mm
Buitendiameter	187.325 mm
Dikte	105.56 mm
Type	-
Gewicht	11600 g
Smering	-
Verpakking	-
Standaard	-

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE