


Naalddaatslager AZ355212-IKO - AZ355212-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naalddaatslager/az355212-iko>

IKO

THRUST BEARINGS

Thrust Roller Bearings

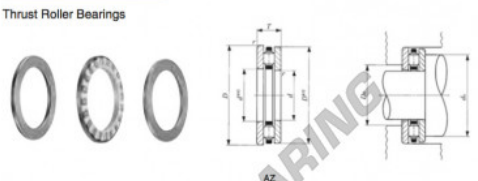

| Shaft dia. mm | Identification number | | | | | | | |
|---------------|-----------------------|---------------|-----------------------|---------------|----------------|----------------|---------------|--|
| | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring | Outer ring | Mass (Ref.) g | |
| 35 | AZ 355212 | 99 | AZK 35525 | 36 | WS 3552 | GS 3552 | 31.5 | |

| Boundary dimensions mm | | | | | | | | | | Standard mounting dimensions mm | Basic dynamic load rating C | Basic static load rating C ₀ | Allowable rotational speed ⁽²⁾ | |
|------------------------|----|----|----------------|----------------|----------------|-----|--------------------|----------------|----------------|---------------------------------|-----------------------------|---|---|-------|
| d | D | T | d _c | D _c | D _w | B | r _s (1) | C ₁ | C ₂ | d ₄ Min. | D ₄ Max. | N | N | rpm |
| 35 | 52 | 12 | 35.05 | 51.5 | 5 | 3.5 | 0.6 | 38 | 49 | 49 | 39 | 29 100 | 91 100 | 7 000 |

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCTKENMERKEN

| | |
|----------------|---------------|
| Merk | IKO |
| N° Ean13 | 3616060465931 |
| Binnendiameter | 35 mm |
| Buitendiameter | 52 mm |
| Dikte | 12 mm |
| Gewicht | 99 g |
| Verpakking | 1 |

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE