


Naaldtaatslager AZK6013010-IKO - AZK6013010-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldtaatslager/azk6013010-iko>

IKO
THRUST BEARINGS

Thrust Roller Bearings

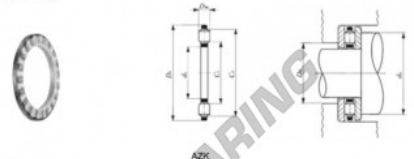

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
60	AZ 6013026	2 090	AZK 6013010	790	WS 60130	GS 60130	660	

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d _s Min.	D _s Max.	N	N	rpm
60	130	26	60.05	129.5	10	8	1.5	79	119	119	80	158 000	634 000	3 000

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060466075
Binnendiameter	60 mm
Buitendiameter	130 mm
Dikte	10 mm
Gewicht	790 g
Verpakking	-
Standaard	-

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE