


Naaldtaatslager AZK10019015-IKO - AZK10019015-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldtaatslager/azk10019015-iko>

IKO

THRUST BEARINGS

Thrust Roller Bearings

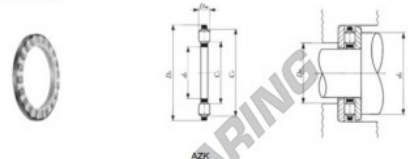

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
100	AZ 10019039	5 960	AZK 10019015	2 120	WS 100190	GS 100190	1 920

Boundary dimensions mm										Standard mounting dimensions mm	Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾	
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d ₄ Min.	D ₄ Max.	N	N	rpm
100	190	39	100.1	189.3	15	12	1.5	119	179	177	120	333 000	1 420 000	2 000

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060466174
Binnendiameter	100 mm
Binnendiameter	3.937" inch
Buitendiameter	190 mm
Buitendiameter	7.48" inch
Dikte	15 mm
Dikte	0.591" inch
Gewicht	2120 g
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE