


## Naaldtaatslager AZ28044080-IKO - AZ28044080-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldtaatslager/az28044080-iko>

**IKO**

**THRUST BEARINGS**

Thrust Roller Bearings

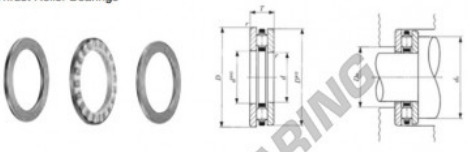

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
280	<b>AZ 28044080</b>	54 600	<b>AZK 28044030</b>	19 200	WS 280440	GS 280440	17 700

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(2)</sup>
d	D	T	d <sub>c</sub>	D <sub>c</sub>	D <sub>w</sub>	B	r <sub>s</sub> (1)	C <sub>1</sub>	C <sub>2</sub>	d <sub>s</sub> Min.	D <sub>s</sub> Max.	N	N	rpm
280	440	80	280.15	438	30	25	5	309	422	420	311	1 420 000	7 490 000	800

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952487779
Binnendiameter	280 mm
Buitendiameter	440 mm
Dikte	80 mm
Gewicht	54600 g
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE