


## Naaldtaatslager AZK20026520-IKO - AZK20026520-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldtaatslager/azk20026520-iko>

**IKO**  
**THRUST BEARINGS**  
Thrust Roller Bearings

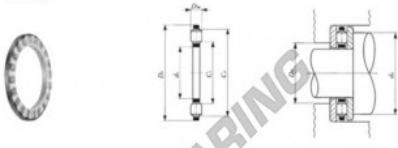

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
200	AZ 20026548	8 430	AZK 20026520	3 250	WS 200265	GS 200265	2 590

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(*)</sup>
d	D	T	d <sub>c</sub>	D <sub>c</sub>	D <sub>w</sub>	B	r <sub>s</sub> (1)	C <sub>1</sub>	C <sub>2</sub>	d <sub>s</sub> Min.	D <sub>s</sub> Max.	N	N	rpm
200	265	48	200.15	264	20	14	2	215	255	254	216	465 000	2 080 000	1 300

Notes: <sup>(\*)</sup> Minimum allowable value of chamfer dimension r  
<sup>(1)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060466822
Binnendiameter	200 mm
Buitendiameter	265 mm
Dikte	20 mm
Gewicht	3250 g
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE