


Naaldtaatslager AZK28044030-IKO - AZK28044030-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldtaatslager/azk28044030-iko>

IKO
THRUST BEARINGS
Thrust Roller Bearings

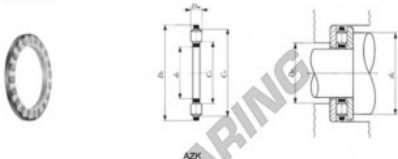

| Shaft dia. mm | Identification number | | | | | | | |
|---------------|-----------------------|---------------|-----------------------|---------------|------------|------------|---------------|--|
| | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring | Outer ring | Mass (Ref.) g | |
| 280 | AZ 28044080 | 54 600 | AZK 28044030 | 19 200 | WS 280440 | GS 280440 | 17 700 | |

| Boundary dimensions mm | | | | | | | | | | Standard mounting dimensions mm | | Basic dynamic load rating C | Basic static load rating C ₀ | Allowable rotational speed ⁽²⁾ |
|------------------------|-----|----|----------------|----------------|----------------|----|--------------------|----------------|----------------|---------------------------------|---------------------|-----------------------------|---|---|
| d | D | T | d _c | D _c | D _w | B | r _s (1) | C ₁ | C ₂ | d _s Min. | D _s Max. | N | N | rpm |
| 280 | 440 | 80 | 280.15 | 438 | 30 | 25 | 5 | 309 | 422 | 420 | 311 | 1 420 000 | 7 490 000 | 800 |

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCTKENMERKEN

| | |
|----------------|---------------|
| Merk | IKO |
| N° Ean13 | 3663952487991 |
| Binnendiameter | 280 mm |
| Buitendiameter | 440 mm |
| Dikte | 30 mm |
| Gewicht | 19200 g |
| Verpakking | 1 |

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE