


SI Stangkop PF15-00-502-DURBAL - PF15-00-502-DURBAL

<https://www.123kogellager.nl/kogellager-behuizing/stangkop/si/pf15-00-502-durbal>

PF15-00-502

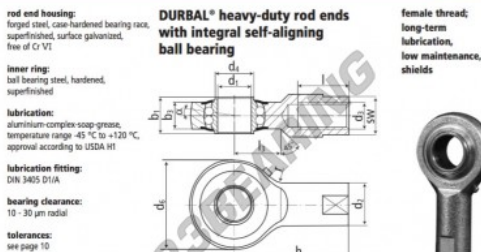

rod end housing:
forged steel, case-hardened bearing race, superfinished, surface galvanized, free of Cr VI

inner ring:
ball bearing steel, hardened, superfinished

lubrication:
aluminium-complex soap-grease, temperature range -45 °C to +120 °C, approval according to USDA HI

lubrication fitting:
DIN 3405 D1/A

bearing clearance:
10 - 30 µm radial

tolerances:
see page 10

DURBAL® heavy-duty rod ends with integral self-aligning ball bearing

female thread;
long-term lubrication, low maintenance, shields



order number		measurements [mm]										
type	right hand thread	left hand thread	d ₁	d ₂	d ₃	d ₄	d ₅	d ₆	b ₁	b ₂		
PF 15 -00	-502		15	19	M 12	17,5	40	16,5	12			
measurements [mm]		weight	calculation factors	rotational speed limit	basic load rating							
type	h	l	r	SW	α	Y	Y ₀	P _{max} [mm]	C [N]	C ₀ [N]		
PF 15	51	24	20,0	15	17	7,0	0,140	2,30	2,41	1025	5000	1890

PRODUCTKENMERKEN

Merk	DURBAL
N° Ean13	3663952507385
Binnendiameter	15 mm
Binnendiameter	0.591" inch
Buitendiameter	40 mm
Buitendiameter	1.575" inch
Dikte	16.5 mm
Dikte	0.65" inch
Type	SI
Gewicht	140 g
Draad	Linkse draad
Smering	met
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE