


Naaldhulslager TAM916-IKO - TAM916-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/tam916-iko>

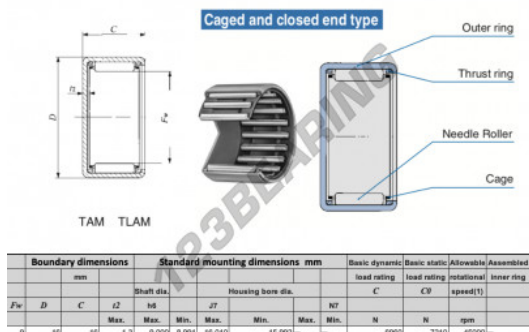

Boundary dimensions			Standard mounting dimensions mm					Basic dynamic load rating		Basic static load rating		Allowable rotational speed	
mm			mm					C		CV		rpm	
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>d</i>		<i>D₁</i>			<i>W</i>	<i>N</i>	<i>N</i>	<i>N</i>	<i>N</i>	<i>N</i>
			Max.	Min.	Max.	Min.	Max.	Min.					
0	16	16	1.3	0.000	8.991	16.010	15.992	—	6960	7210	45000	—	—

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060598769
Binnendiameter	9 mm
Buitendiameter	16 mm
Dikte	16 mm
Grenstoerental	45000 rpm
Dynamische belasting	69.6 kN
Statische belasting	72.1 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE