


Naaldhulslager TAM5012-IKO - TAM5012-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/tam5012-iko>

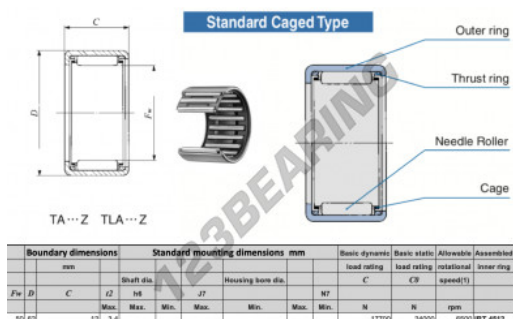

Boundary dimensions		Standard mounting dimensions mm						Basic dynamic load rating		Basic static load rating		Allowable rotational speed(r)	Assembled inner ring
mm		Shaft dia.		Housing bore dia.				C		C0			
Fw	D	C	H	J1	J2	J3	J4	N	N0	N1	rpm		
50	62	12	3.6					17700	24000	6500	RT 6512		

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060599827
Binnendiameter	50 mm
Buitendiameter	62 mm
Dikte	12 mm
Grenstoerental	6500 rpm
Dynamische belasting	17.7 kN
Statische belasting	24 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE