


Naaldhulslager TAM6525-IKO - TAM6525-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/tam6525-iko>

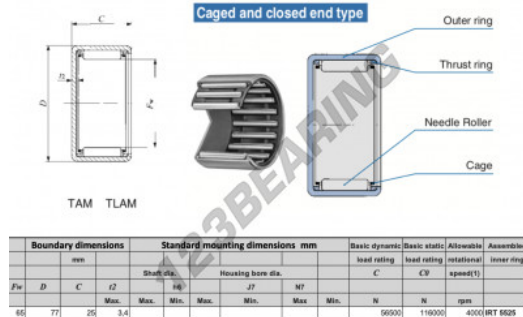

Boundary dimensions			Standard mounting dimensions mm						Basic dynamic load rating	Basic static load rating	Allowable rotational speed(V)	Assembled inner ring
For	D	C	d	Shaft dia.		Housing bore dia.		C	CP	rpm		
	Max.	Max.	Min.	Max.	Min.	Max.	Min.	N	N	rpm		
65	77	25	3,4					56000	116000	4000	RT 625	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060600035
Binnendiameter	65 mm
Buitendiameter	77 mm
Dikte	25 mm
Grenstoerental	4000 rpm
Dynamische belasting	56.5 kN
Statische belasting	116 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE