


Naaldhulslager YB105-IKO - YB105-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/yb105-iko>

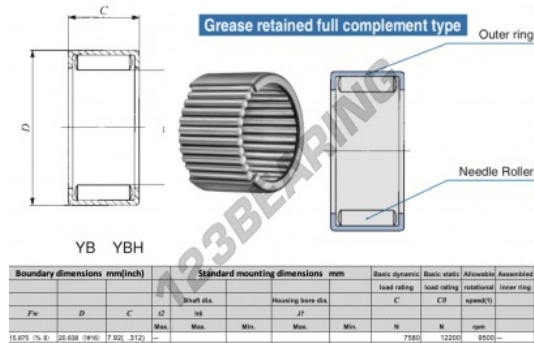

Boundary dimensions mm(inch)				Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable speed	
P_w	D	C	ΔJ	Shaft dia.	Housing bore dia.	J_1	J_2	C	CR	CR	rpm	rpm	
15.875 (0.625)	20.638 (0.8125)	7.92 (0.3118)	-	Max.	Min.	Max.	Min.	7580	12200	9500	-	-	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060600189
Binnendiameter	15.875 mm
Buitendiameter	20.638 mm
Dikte	7.92 mm
Grenstoerental	9500 rpm
Dynamische belasting	7580 kN
Statische belasting	12.2 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE