


## Naaldhulslager BHAM812-IKO - BHAM812-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/bham812-iko>

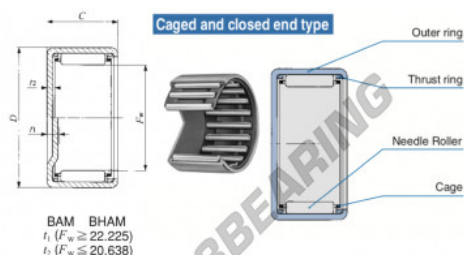

BAM BHAM  
 $f_1 (F_w \geq 22.225)$   
 $f_2 (F_w \leq 20.638)$

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled outer ring
$P_{10}$	B	C	$r_1$	$r_2$	Housing bore dia.	C	CR	rpm	
		Max.	Min.	Min.	Max.	Min.	H	N	rpm
12.708 (0.5)	19.050 (0.75)	19.05 (0.75)	1.3				11100	14500	30000

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060600257
Binnendiameter	12.7 mm
Buitendiameter	19.05 mm
Dikte	19.05 mm
Grenstoerental	30000 rpm
Dynamische belasting	11.1 kN
Statische belasting	14.5 kN
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE