


Naaldhulslager BHAM1610-IKO - BHAM1610-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/bham1610-iko>

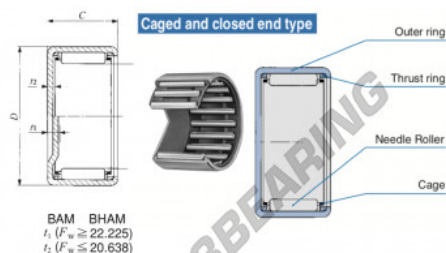

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable axial displacement	Assembled
F_w	D	C	r_1	r_2	Flange bore dia.	C	CP	C_0	mm(0.01)	mm	
21.600 (1)	33.338 (1 5/16)	15.881 (625)	3.4					15300	22100	15000	-

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060600431
Binnendiameter	25.4 mm
Binnendiameter	1" inch
Buitendiameter	33.338 mm
Buitendiameter	1 5/16" inch
Dikte	15.88 mm
Dikte	5/8" inch
Grenstoerental	15000 rpm
Dynamische belasting	15.3 kN
Statische belasting	22.1 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE