


Naaldhulslager YBH1612-IKO - YBH1612-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ybh1612-iko>

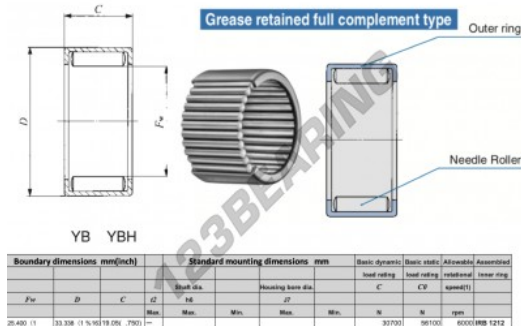

Boundary dimensions mm[inch]		Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowed speed	
F_w	D	C	d_2	H	Housing bore dia.	C	C_0	rpm	rpm	rpm	rpm
25.400 (1)	33.338 (1 1/4)	19.050 (3/4)	—	—	—	—	—	30700	98100	6000	1212

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060600479
Binnendiameter	25.4 mm
Buitendiameter	33.338 mm
Dikte	19.05 mm
Grenstoerental	6000 rpm
Dynamische belasting	30.7 kN
Statische belasting	56.1 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE