


Naaldhulslager YB1910-IKO - YB1910-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/yb1910-iko>

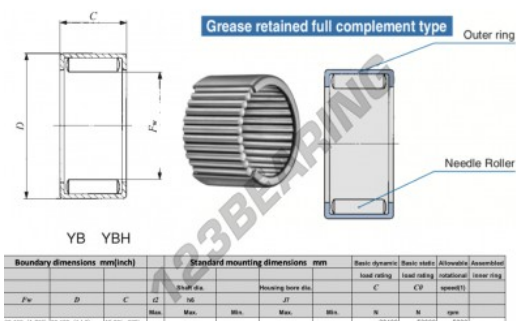

| Boundary dimensions mm[inch] | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed | Assembly clearance ring | |
|------------------------------|----------------|---------------------------------|-------|-------|--------------------|---------------------------|--------------------------|----------------------------|-------------------------|------|
| F_w | D | C | C_1 | C_2 | Mounting bore dia. | C | CP | rpm | | |
| 35.192 (1.385) | 38.100 (1.500) | 15.880 (0.625) | — | — | Min. Max. | Min. Max. | Min. Max. | 28400 | 53000 | 5000 |

PRODUCTKENMERKEN

| | |
|----------------------|---------------|
| Merk | IKO |
| N° Ean13 | 3616060600554 |
| Binnendiameter | 30.162 mm |
| Buitendiameter | 38.1 mm |
| Dikte | 15.88 mm |
| Grenstoerental | 5000 rpm |
| Dynamische belasting | 28.4 kN |
| Statische belasting | 53.6 kN |
| Verpakking | 1 |

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE