


## Naaldhulslager BAM2812-IKO - BAM2812-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/bam2812-iko>

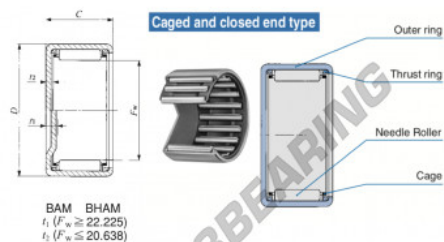

Boundary dimensions mm(inch)			Standard mounting dimensions mm			Basic dynamic load rating	Basic static load rating	Admissible rotational speed	Admissible inner ring
$D$	$B$	$C$	$r$	$s$	$l_1$	$C$	$C_0$	rpm	
44.452 (1.749)	33.875 (1.334)	19.051 (750)	0.2	0.1	19.05	25200	44500	7500	RB 2412

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060600783
Binnendiameter	44.45 mm
Buitendiameter	53.975 mm
Dikte	19.05 mm
Grenstoerental	7500 rpm
Dynamische belasting	25.2 kN
Statische belasting	44.5 kN
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE