


Naaldhulslager TLA4020-UU-IKO - TLA4020-UU-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/tla4020-uu-iko>

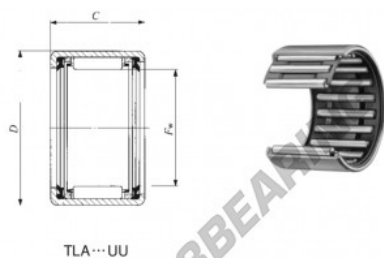

TLA...UU

Shell Type needle roller with seals

Boundary dimension	mm	Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed(1)
		Shaft dia.		Housing bore dia.		C	CP	N	N	
F		H		H1						
x	D	C	Min.	Max.	Min.	Max.	N	N	rpm	
	50	54	20	52,000	49,850	57,591	57,591	23000	64100	3500

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601087
Binnendiameter	40 mm
Buitendiameter	47 mm
Dikte	20 mm
Grenstoerental	4500 rpm
Dynamische belasting	16.7 kN
Statische belasting	33.7 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE