


Naaldhulslager BA166-Z-IKO - BA166-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba166-z-iko>

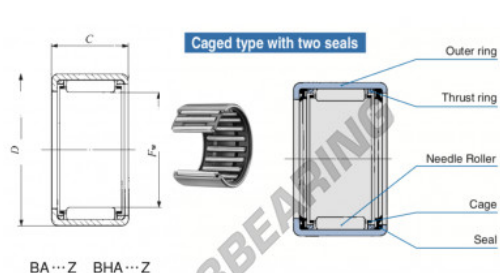

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled
F_w	D	C	d_2	h_6	Housing bore dia.	$J7$	load rating	load rating	rotational	inner ring
			Max.	Min.	Max.	Min.	N	N	rpm	
25.400 (1.0)	31.750 (1.25)	9.520 (0.375)	2.0				6010	8120	15000	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601148
Binnendiameter	25.4 mm
Buitendiameter	31.75 mm
Dikte	9.52 mm
Grenstoerental	15000 rpm
Dynamische belasting	6.01 kN
Statische belasting	8.02 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE