


Naaldhulslager BA167-Z-IKO - BA167-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba167-z-iko>

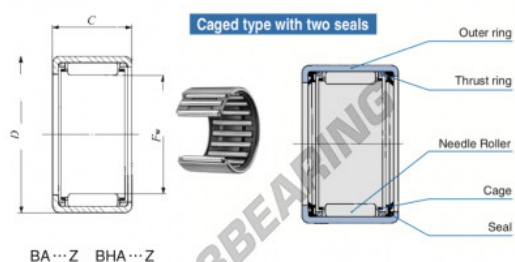

| Boundary dimensions mm[inch] | | | Standard mounting dimensions mm | | | | Basic dynamic | | Basic static | | Allowable | Assembled |
|------------------------------|----------|----------|---------------------------------|---------------------------------|--|------|---------------|-------------|--------------|------------|-----------|-----------|
| <i>F_{or}</i> | <i>D</i> | <i>C</i> | <i>c₂</i> | Shaft dia. <i>t₆</i> | Housing bore dia. <i>J₇</i> | | load rating | load rating | rotational | inner ring | | |
| | | | Max. | Max. | Min. | Max. | Min. | N | N | rpm | | |
| 25.400 | 31.750 | 11.130 | 2.5 | | | | | 7720 | 11100 | 15000 | | |

PRODUCTKENMERKEN

| | |
|----------------------|---------------|
| Merk | IKO |
| N° Ean13 | 3616060601155 |
| Binnendiameter | 25.4 mm |
| Buitendiameter | 31.75 mm |
| Dikte | 11.13 mm |
| Grenstoerental | 15000 rpm |
| Dynamische belasting | 7.72 kN |
| Statische belasting | 11.1 kN |
| Verpakking | 1 |

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE