


## Naaldhulslager BA186-Z-IKO - BA186-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba186-z-iko>

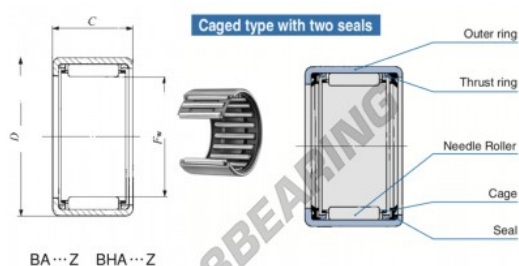

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(l)	Assembled inner ring
$F_w$	$D$	$C$	$t_2$	$H_1$	$J_1$	$C$	$C_0$	rpm		
28.575 (1 1/8)	34.925 (1 3/8)	9.52 (3/8)	2.5					6330	8910	
			Max.	Max.	Min.	Max.	Min.	N	N	

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601247
Binnendiameter	28.575 mm
Binnendiameter	1 1/8" inch
Buitendiameter	34.925 mm
Buitendiameter	1 3/8" inch
Dikte	9.52 mm
Dikte	0.375" inch
Grenstoerental	13000 rpm
Dynamische belasting	6.33 kN
Statische belasting	8.91 kN
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE