


## Naaldhulslager BA1812-Z-IKO - BA1812-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba1812-z-iko>

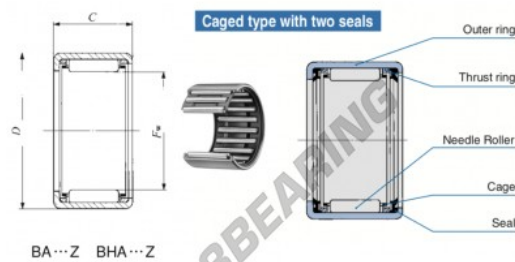

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed	Assembled inner ring
$F_w$	$D$	$C$	$r_1$	Shaft dia. $H_6$	Housing bore dia. $J7$	$C$	$C_0$	$N$	$N_0$	rpm		
28.675 (1.1286)	34.925 (1.375)	19.05 (0.75)	2.8	Max. Min.	Max. Min.	Max. Min.	Max. Min.	15000	26900	13000	RB 1412	

### PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601261
Binnendiameter	28.575 mm
Binnendiameter	1 1/8" inch
Buitendiameter	34.925 mm
Buitendiameter	1 3/8" inch
Dikte	19.05 mm
Dikte	3/4" inch
Grenstoerental	13000 rpm
Dynamische belasting	15 kN
Statische belasting	26.9 kN
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE