


Naaldhulslager BA1910-Z-IKO - BA1910-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba1910-z-iko>

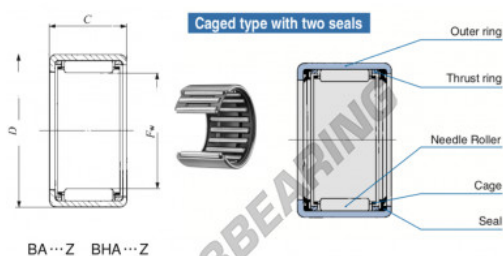

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed ⁽¹⁾		Assembled inner ring
F_w	D	C	d_2	H_0	Housing bore dia. J_7		C	C_0	n	n_0			
			Max.	Max.	Min.	Max.	Min.	H.	H.	rpm			
36.162	1.38.100 (1.12)	15.88 (625)	2.8					15000	22500	12000	—		

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601292
Binnendiameter	30.162 mm
Binnendiameter	1 3/16" inch
Buitendiameter	38.1 mm
Buitendiameter	1 1/2" inch
Dikte	15.88 mm
Dikte	5/8" inch
Grenstoerental	12000 rpm
Dynamische belasting	15 kN
Statische belasting	22.5 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE