


Naaldhulslager BA1916-Z-IKO - BA1916-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba1916-z-iko>

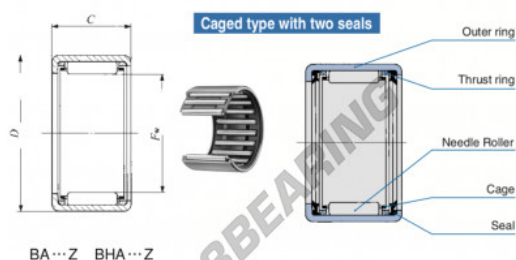

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	d_2	d_4	d_7	C	C_0	rpm		
30.162 (1.1870)	38.100 (1.5000)	25.40 (1.000)	Max. 2.8	Max. 30.162	Min. 30.146	Max. 38.114	Min. 38.089	25800	45300	12000

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601308
Binnendiameter	30.162 mm
Buitendiameter	38.1 mm
Dikte	25.4 mm
Grenstoerental	12000 rpm
Dynamische belasting	25.8 kN
Statische belasting	45.3 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE