


## Naaldhulslager BA2012-Z-IKO - BA2012-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba2012-z-iko>

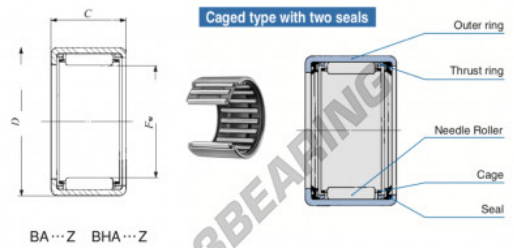

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled outer ring	
$F_w$	$D$	$C$	Shaft dia.	Housing bore dia.	$JT$	$C'$	$CP$				
31.790 (1.14)	38.100 (1.12)	19.051 (750)	Min. 2.8	Max. 31.750	31.734	Min. 38.114	Max. 38.089	15700	29600	12000	RB 1812

### PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601339
Binnendiameter	31.75 mm
Buitendiameter	38.1 mm
Dikte	19.05 mm
Grenstoerental	12000 rpm
Gewicht	33 g
Dynamische belasting	15.7 kN
Statische belasting	29.6 kN
Verpakking	1
Standaard	Geen standaard

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE