


## Naaldhulslager BA218-Z-IKO - BA218-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba218-z-iko>

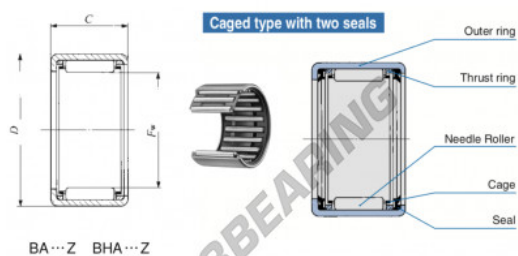

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled
$F_w$	$D$	$C$	$d_2$	Shaft dia.	Housing bore dia.	$C$	$C_0$	rotational	inner ring	
			Max.	Min.	Max.	Min.	N	N	rpm	
33.338 (1.3125)	41.275 (1.625)	12.750 (500)	2.0				11100	15800	11000	RB 168-1

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601360
Binnendiameter	33.338 mm
Buitendiameter	41.275 mm
Dikte	12.7 mm
Grenstoerental	11000 rpm
Dynamische belasting	11.1 kN
Statische belasting	15.8 kN
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE