


Naaldhulslager BA248-Z-IKO - BA248-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba248-z-iko>

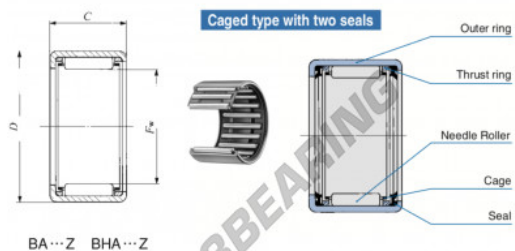

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable	Assembled
F_w	D	C	d_2	t_6	J_7	C	C_0	rotational speed(1)	inner ring			
			Max.	Max.	Min.	Max.	Min.	N	N	rpm		
36 100	11 1/2	47.625	11.6	9	12.70	5000	2.8			12900	17900	9000—

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601421
Binnendiameter	38.1 mm
Buitendiameter	47.625 mm
Dikte	12.7 mm
Grenstoerental	9000 rpm
Dynamische belasting	12.9 kN
Statische belasting	17.9 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE