


Naaldhulslager BA2410-Z-IKO - BA2410-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba2410-z-iko>

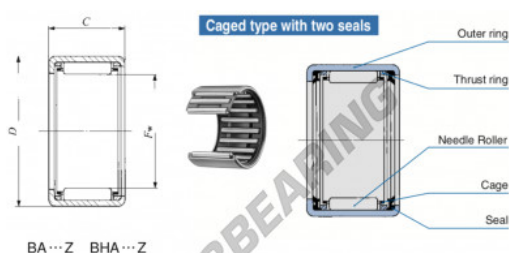

| Boundary dimensions mm(inch) | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed(r/min) | Assembled inner ring |
|------------------------------|-----------------|---------------------------------|------|------|------|---------------------------|--------------------------|-----------------------------------|----------------------|
| F_w | D | C | d | D | C | C ₁₀ | C ₀ | | |
| | Max. | Max. | Min. | Max. | Min. | N | N | rpm | |
| 35 120 (1 1/2) | 47.625 (1 8/16) | 15.88 (.625) | 2.6 | | | 17800 | 27100 | 9000 | IRB 2010 |

PRODUCTKENMERKEN

| | |
|----------------------|---------------|
| Merk | IKO |
| N° Ean13 | 3616060601438 |
| Binnendiameter | 38.1 mm |
| Buitendiameter | 47.625 mm |
| Dikte | 15.88 mm |
| Grenstoerental | 9000 rpm |
| Dynamische belasting | 17.8 kN |
| Statische belasting | 27.1 kN |
| Verpakking | 1 |

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE