


Naaldhulslager BA2412-Z-IKO - BA2412-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba2412-z-iko>

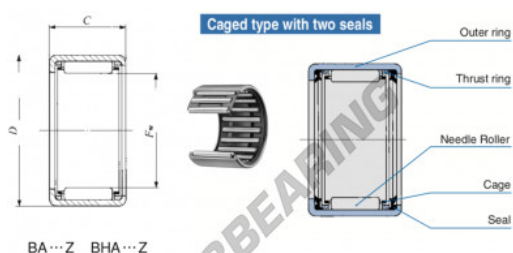

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(l)	Assembled inner ring
F_w	D	C	d	H	C	C ₀			
	Min.	Max.	Min.	Max.	Min.	Max.	N	N	
38.100 (1.12)	47.625 (1.88)	19.05 (.750)	2.8				22500	36900	9000

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601445
Binnendiameter	38.1 mm
Buitendiameter	47.625 mm
Dikte	19.05 mm
Grenstoerental	9000 rpm
Dynamische belasting	22.5 kN
Statische belasting	36.6 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE