


Naaldhulslager BA2414-Z-IKO - BA2414-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba2414-z-iko>

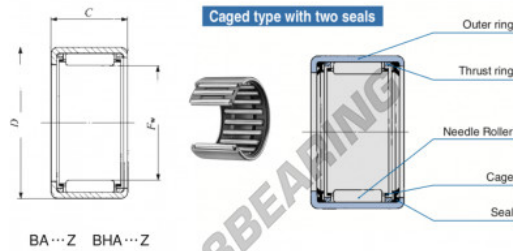

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring	
F_w	D	C	d_1	d_2	d_3	d_4	C	C_0	n	n_{gr}	
			Min.	Max.	Min.	Max.	Min.	N	N	rpm	
BA 100	(1 1/2)	47.625	(1 4/8)	22.22	(8/8)	2.6			26700	45400	9000

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601452
Binnendiameter	38.1 mm
Buitendiameter	47.625 mm
Dikte	22.22 mm
Grenstoerental	9000 rpm
Dynamische belasting	26.7 kN
Statische belasting	45.6 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE