


Naaldhulslager BA2610-Z-IKO - BA2610-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba2610-z-iko>

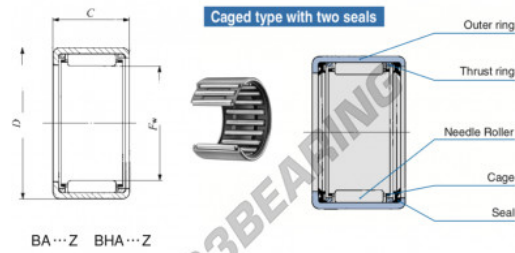

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>d</i>	<i>H₁₅</i>	<i>J₇</i>	<i>C</i>	<i>C₀</i>	rpm		
41.275 (1 5/8)	50.800 (2)	15.88 (5/8)	41.275 (1 5/8)	15.88 (5/8)	2.6	18900	30000	8000	1218	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601490
Binnendiameter	41.275 mm
Buitendiameter	50.8 mm
Dikte	15.88 mm
Grenstoerental	8000 rpm
Dynamische belasting	18.9 kN
Statische belasting	30 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE