


Naaldhulslager BA3010-Z-IKO - BA3010-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba3010-z-iko>

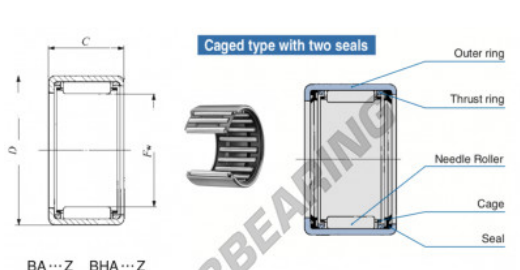

Boundary dimensions mm[inch]		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	d_2	d_1	d_3	C	C ₀	rpm	
47.625 (1.8 8/16)	57.150 (2.2 4/16)	15.880 (.625)	2.0	46	47	20300	34500	7000	RB 2419-1
			Max.	Min.	Max.	Min.	N	N	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601551
Binnendiameter	47.625 mm
Buitendiameter	57.15 mm
Dikte	15.88 mm
Grenstoerental	7000 rpm
Dynamische belasting	20.3 kN
Statische belasting	34.5 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE