


## Naaldhulslager BA3016-Z-IKO - BA3016-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba3016-z-iko>

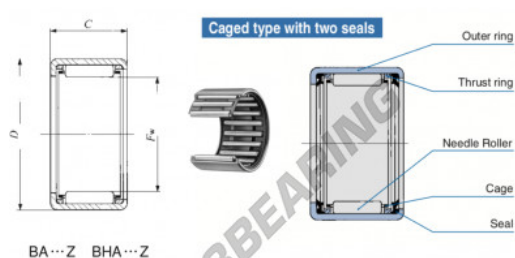

| Boundary dimensions mm(inch) |              |               | Standard mounting dimensions mm |       |      |      | Basic dynamic load rating | Basic static load rating | Allowable rotational speed(1) | Assembled inner ring |
|------------------------------|--------------|---------------|---------------------------------|-------|------|------|---------------------------|--------------------------|-------------------------------|----------------------|
| $F_w$                        | $D$          | $C$           | $c_2$                           | $h_6$ | $JT$ | $C$  | $C_0$                     | $n$                      | $N$                           | $n_{ring}$           |
|                              |              |               | Max.                            | Min.  | Max. | Min. |                           |                          |                               |                      |
| 47.625 (1.8 & 9/16)          | 57.15 (2.25) | 25.40 (1.000) | 2.8                             |       |      |      |                           | 95400                    | 70400                         | 7000—                |

### PRODUCTKENMERKEN

|                      |               |
|----------------------|---------------|
| Merk                 | IKO           |
| N° Ean13             | 3616060601568 |
| Binnendiameter       | 47.625 mm     |
| Buitendiameter       | 57.15 mm      |
| Dikte                | 25.4 mm       |
| Grenstoerental       | 7000 rpm      |
| Dynamische belasting | 35.4 kN       |
| Statische belasting  | 70.6 kN       |
| Verpakking           | 1             |

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE