


Naaldhulslager BA3220-Z-IKO - BA3220-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba3220-z-iko>

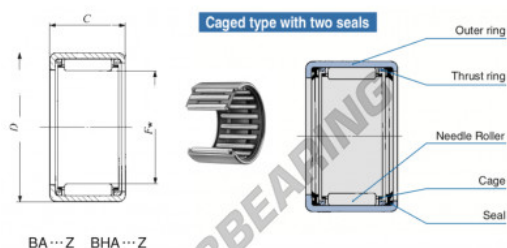

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	d	H	J	C'	C_0			
50.800 (2)	60.325 (2 #8)	31.75 (1.250)	2.8							
			Max.	Max.	Min.	Max.	Min.	N	N	
								rpm	rpm	
								46600	102000	
								6000	1800	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601599
Binnendiameter	50.8 mm
Buitendiameter	60.325 mm
Dikte	31.75 mm
Grenstoerental	6000 rpm
Gewicht	128 g
Dynamische belasting	46.6 kN
Statische belasting	102 kN
Verpakking	-
Standaard	Geen standaard

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE