


Naaldhulslager BA348-Z-IKO - BA348-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba348-z-iko>

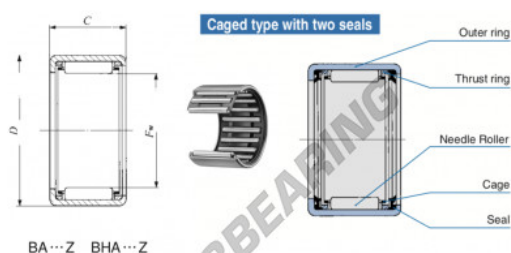

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring
F_w	D	C	d_1	d_2	Housing bore dia.	C	C ₀		
	Max.	Min.	Max.	Min.	Max.	Min.	N	N	rpm
53.975 (2.124)	63.500 (2.500)	12.701 (500)	2.6				16100	26600	5500

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601612
Binnendiameter	53.975 mm
Buitendiameter	63.5 mm
Dikte	12.7 mm
Grenstoerental	5500 rpm
Dynamische belasting	16.1 kN
Statische belasting	26.6 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE