


## Naaldhulslager BA3424-Z-IKO - BA3424-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba3424-z-iko>

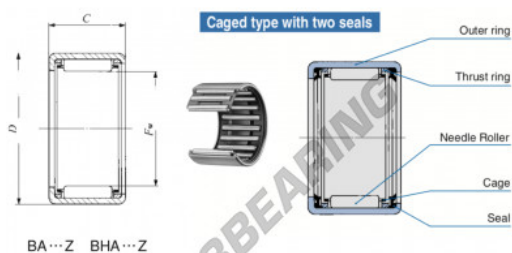

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring
$F_w$	$D$	$C$	$d$	$d_f$	Housing bore dia.	$C$	$C_0$		
			Min.	Max.	Min.	Min.	N	N	
53.975 (2.14)	63.500 (2.50)	38.100 (1.500)	2.0				57900	138000	5000

### PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601636
Binnendiameter	53.975 mm
Buitendiameter	63.5 mm
Dikte	38.1 mm
Grenstoerental	5500 rpm
Dynamische belasting	57.9 kN
Statische belasting	138 kN
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE