


Naaldhulslager BA4216-Z-IKO - BA4216-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba4216-z-iko>

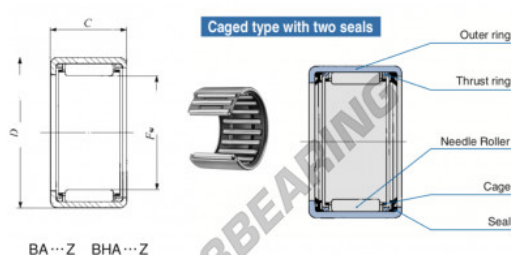

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable	Assembled
F_w	D	C	d	h_0	B	C	C_0	C_0	rotational speed ¹⁾	inner ring	inner ring	
			Max.	Max.	Min.	Max.	Min.	N	N	rpm		
66.675 (2 5/8)	76.200 (3)	25.400 (1.000)	2.0	66.675 (2.625)	66.675 (2.625)	75.210 (2.961)	75.180 (2.959)	42000	87900	4000	MB 3616	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601643
Binnendiameter	66.675 mm
Buitendiameter	76.2 mm
Dikte	25.4 mm
Grenstoerental	4000 rpm
Dynamische belasting	42 kN
Statische belasting	97.9 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE