


Naaldhulslager BA4410-Z-IKO - BA4410-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba4410-z-iko>

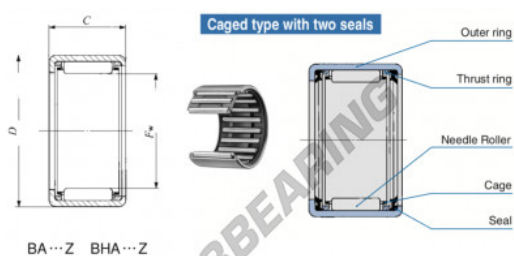

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(T)	Assembled inner ring
F_w	D	C	d_1	d_2	JF	C	C_0			
			Max.	Min.	Max.	Min.	Min.	rpm		
68.850 (2 # 4)	79.375 (3 1/8)	15.886 (.625)	2.8					25000	50600	3500

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601650
Binnendiameter	69.85 mm
Buitendiameter	79.375 mm
Dikte	15.88 mm
Grenstoerental	3500 rpm
Dynamische belasting	25 kN
Statische belasting	50.8 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE