


Naaldhulslager BA56-Z-IKO - BA56-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba56-z-iko>

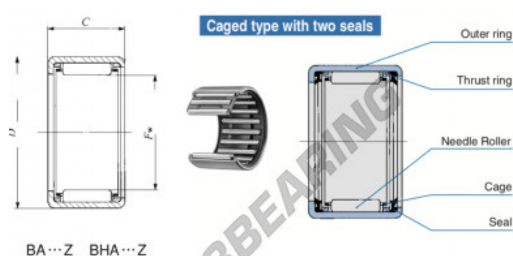

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring
F_w	D	C	d_1	d_2	d_3	d_4	C	C_0	rpm	
7.938 (1/4)	12.700 (1/2)	9.52 (3/8)	Min.	Max.	Min.	Max.	Min.	N	N	
								2620	2390	
									45000	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601728
Binnendiameter	7.938 mm
Buitendiameter	12.7 mm
Dikte	9.52 mm
Grenstoerental	45000 rpm
Dynamische belasting	2.62 kN
Statische belasting	2.39 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE