


## Naaldhulslager BA59-Z-IKO - BA59-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba59-z-iko>

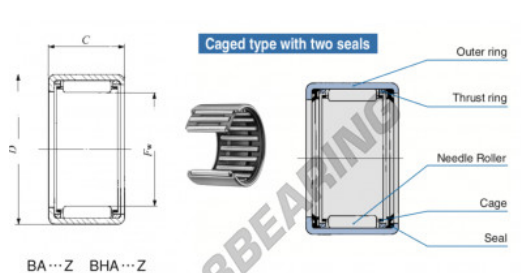

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$d_0$	$J_1$	$C$	$C_0$	$N$	$N_0$	
7.938 (0.3125)	12.706 (0.5002)	14.271 (0.562)	1	Max.	Min.	Max.	Min.	4190	4360	45000

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601742
Binnendiameter	7.938 mm
Binnendiameter	5/16" inch
Buitendiameter	12.7 mm
Buitendiameter	1/2" inch
Dikte	14.27 mm
Dikte	0.562" inch
Grenstoerental	45000 rpm
Dynamische belasting	4.19 kN
Statische belasting	4.36 kN
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE