


Naaldhulslager BA65-Z-IKO - BA65-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba65-z-iko>

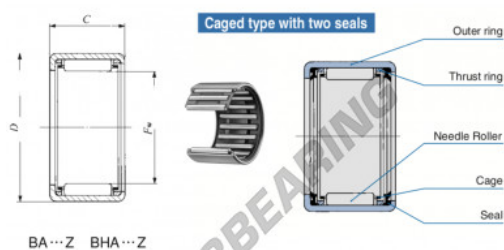

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable relative speed ⁽¹⁾	Assembled inner ring
F_w	D	C	d_2	h_1	JT	C	C_0			
			Max.	Min.	Max.	Min.	N	N	rpm	
0.525 (0.021)	14.288 (0.562)	7.92 (0.312)					2200	2070	40000	—

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601759
Binnendiameter	9.525 mm
Buitendiameter	14.288 mm
Dikte	7.92 mm
Grenstoerental	40000 rpm
Dynamische belasting	2.22 kN
Statische belasting	2.01 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE