


## Naaldhulslager BA610-Z-IKO - BA610-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba610-z-iko>

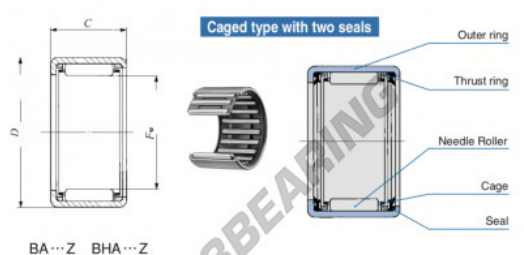

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed(r/min)		Assembled inner ring	
$F_w$	$D$	$C$	$d_2$	$b_6$	$d_7$	$C$		$C_0$		speed(r/min)		inner ring		
			Max.	Min.	Min.	Max.	Min.	N	N	N	min.	max.		
9.525 (3/8)	14.288 (9/16)	15.88 (5/8)	1					9660	6700	40000	—			

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601797
Binnendiameter	9.525 mm
Binnendiameter	3/8" inch
Buitendiameter	14.288 mm
Buitendiameter	9/16" inch
Dikte	15.88 mm
Dikte	5/8" inch
Grenstoerental	40000 rpm
Dynamische belasting	5.66 kN
Statische belasting	6.7 kN
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE